





0.1"(2.54mm) Female Header

Single Row 02 to 40 Contacts

Straight And Right Angle Type Profile : 8.5mm

SPECIFICATION

Current Rating	: 3 Amp
Insulator Resistance	: 5000 Megohms min.
Contact Resistance	: 20 Milliohms Max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40° C ~ +105° C
Contact Material	: Brass
Insulator Material	: Polyester, UL 94V-0
	Standard : P.B.T & NY-6T
Contact Plated	: Full Gold, Full Tin, Selective Plated
Standard	: Gold Flash all Over Nickel

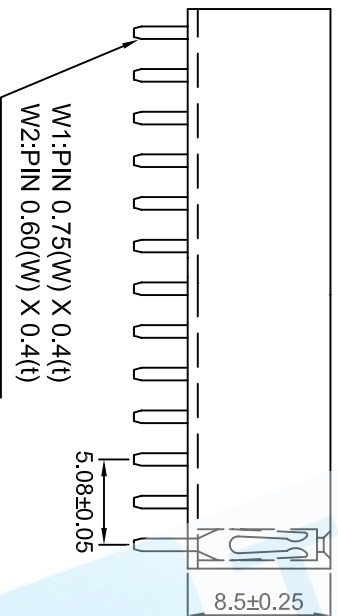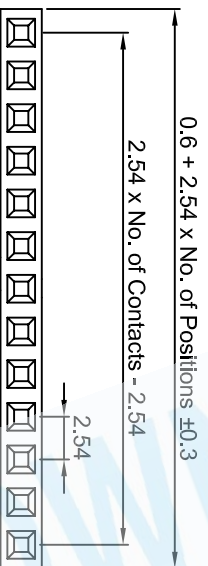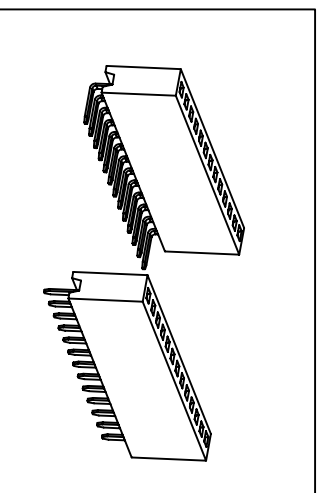

P.C.B. Layout

HOW TO ORDER

F201 - 1 * XX X XX - WX

Series No. _____

Row Type _____

1: Single Row _____

No. of Contact _____

Terminal Type _____

S : Straight Type _____

R : Right Angle Type _____

Contact Plated _____

PIN TYPE _____

W1:PIN 0.75(W) X 0.4(t)

W2:PIN 0.60(W) X 0.4(t)

Full Gold Type	Selective Plated Type Tin Plated on Contact Area Tin Plated on Solder Area	Full Tin Type
GF : Gold Flash	HF : Gold Flash, Tin 100u"	T1 : Tin 100u"
G1 : Gold 3u"	H1 : Gold 3u", Tin 100u"	T2 : Tin 200u"
G2 : Gold 5u"	H2 : Gold 5u", Tin 100u"	
G3 : Gold 10u"	H3 : Gold 10u", Tin 100u"	
G4 : Gold 15u"	H4 : Gold 15u", Tin 100u"	
G5 : Gold 20u"	H5 : Gold 20u", Tin 100u"	
G6 : Gold 30u"	H6 : Gold 30u", Tin 100u"	