


0.039" (1.00mm) Female Header

Single Row 02 to 50 Contacts




SMT Type Profile : 1.50mm

SPECIFICATION

Current Rating	: 1 Amp
Insulator Resistance	: 5000 Megohms min.
Contact Resistance	: 30 Milliohms Max.
Dielectric Withstanding	: AC 100 V
Operating Temperature	: -40°C ~ +105°C
Max Processing Temp	: 230°C For 30~60 Seconds (260°C For 10 Seconds)
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0 Black Standard : LCP
Contact Plated	: Full Gold, Full Tin
Standard	: Gold Flash all Over Nickel

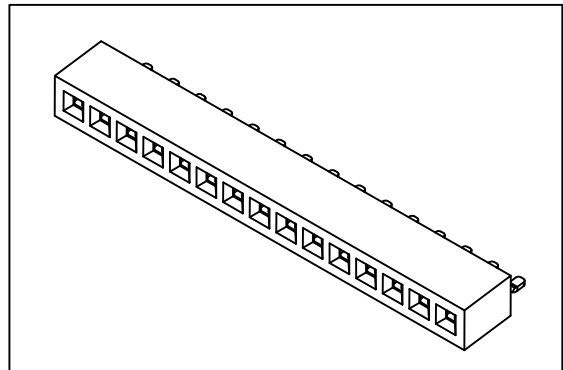


No.	A	B
*#2	2.40	1.00
*#3	3.40	2.00
*#4	4.40	3.00
*#5	5.40	4.00
*#6	6.40	5.00
*#7	7.40	6.00
*#8	8.40	7.00
*#9	9.40	8.00
*#10	10.40	9.00
*#11	11.40	10.00
*#12	12.40	11.00
*#13	13.40	12.00
*#14	14.40	13.00
*#15	15.40	14.00
*#16	16.40	15.00
*#17	17.40	16.00
*#18	18.40	17.00
*#19	19.40	18.00
*#20	20.40	19.00
*#21	21.40	20.00
*#22	22.40	21.00
*#23	23.40	22.00
*#24	24.40	23.00
*#25	25.40	24.00
*#26	26.40	25.00
*#27	27.40	26.00
*#28	28.40	27.00
*#29	29.40	28.00
*#30	30.40	29.00
*#31	31.40	30.00
*#32	32.40	31.00
*#33	33.40	32.00
*#34	34.40	33.00
*#35	35.40	34.00
*#36	36.40	35.00
*#37	37.40	36.00
*#38	38.40	37.00
*#39	39.40	38.00
*#40	40.40	39.00
*#41	41.40	40.00
*#42	42.40	41.00
*#43	43.40	42.00
*#44	44.40	43.00
*#45	45.40	44.00
*#46	46.40	45.00
*#47	47.40	46.00
*#48	48.40	47.00
*#49	49.40	48.00
*#50	50.40	49.00

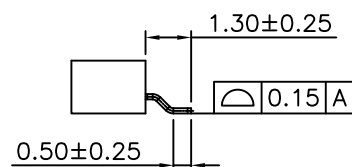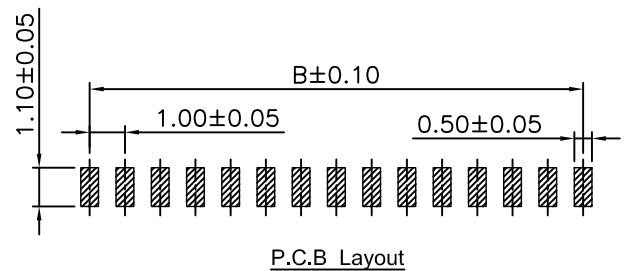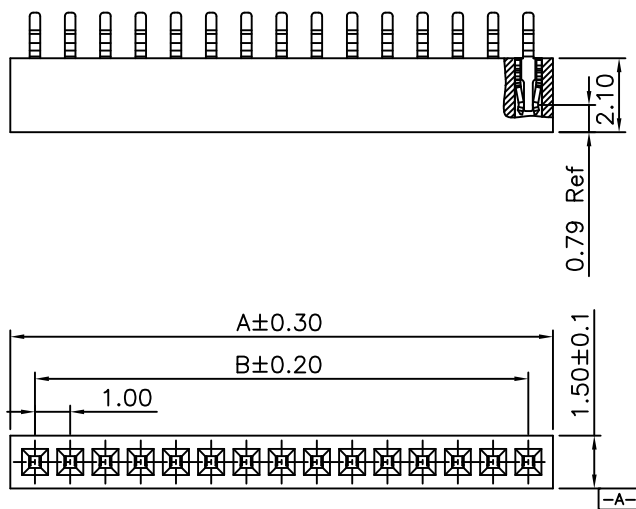

02~20變形量<0.20mm Max.
21~30變形量<0.30mm Max.
31~50變形量<0.40mm Max.

HOW TO ORDER

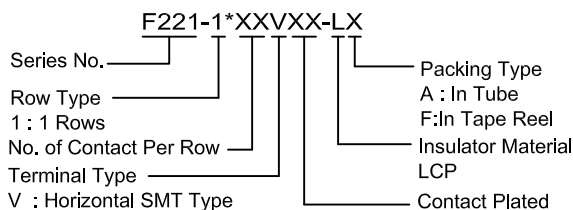

Full Gold Type	Full Tin Type
GF : Gold Flash	T1 : Tin 100u"
G1 : Gold 3u"	T2 : Tin 200u"
G2 : Gold 5u"	T3 : Tin 150u"
G3 : Gold 10u"	
G4 : Gold 15u"	
G5 : Gold 20u"	
G6 : Gold 30u"	
G7 : Gold 50u"	