

# 0.079" (2.0mm) Pin Header

## Single Row 02 to 40 Contacts






### SMT Type

#### SPECIFICATION

Current Rating : 1 Amp  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 Milliohms Max.  
 Dielectric Withstanding : AC 500 V  
 Operating Temperature : -40°C ~ +105°C  
 Max Processing Temp : 230°C For 30~60 Seconds  
 (260°C For 10 Seconds)

Contact Material : Brass  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon-6T

Contact Plated : Full Gold, Full Tin, Selective Plated

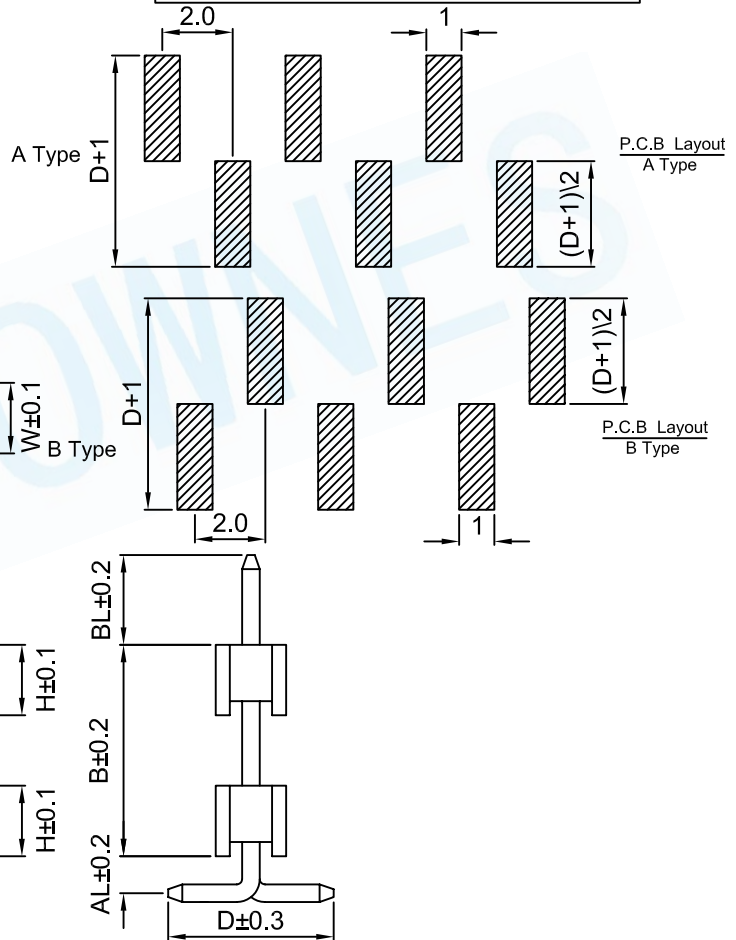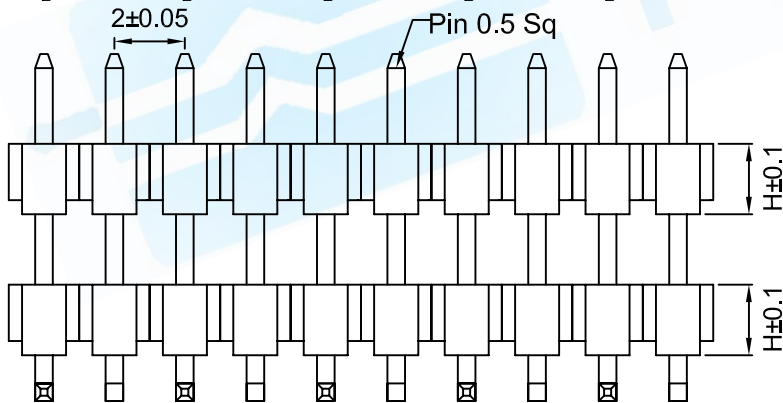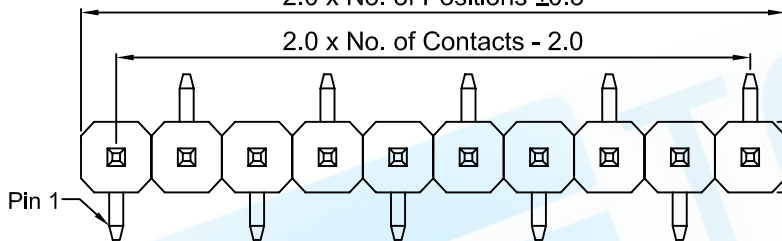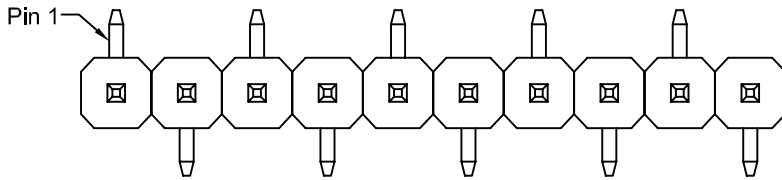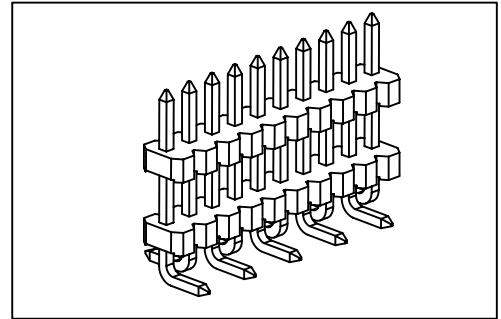

## HOW TO ORDER

P104-21 \* XX M XX XX- X-X X- X

SERIES NO. \_\_\_\_\_  
 PIN SERIES \_\_\_\_\_  
 2: PITCH=2.0  
 ROW TYPE \_\_\_\_\_  
 1: SINGLE ROW  
 NO.OF CONTACT PER ROW \_\_\_\_\_  
 TERMINAL TYPE \_\_\_\_\_  
 M: SMT  
 CONTACT PLATED \_\_\_\_\_  
 流水號(留法,材質...)

PACKING TYPE  
 0: W/O CAP IN PLASTIC BAG  
 A: W/O CAP IN TUBE  
 B: W/ CAP IN TUBE  
 C: W/ CAP IN TAPE & REEL

1:H=1.5mm W=2.0mm  
 2:H=2.0mm W=2.0mm

PCB TYPE  
 A: A TYPE  
 B: B TYPE

Full Gold Type	Selective Plated Type Gold Plated on Contact Area Tin Plated on Solder Area	Full Tin Type
GF : Gold Flash	HF : Gold Flash, Tin 100u"	T1 : Tin 100u"
G1 : Gold 3u"	H1 : Gold 3u", Tin 100u"	T2 : Tin 200u"
G2 : Gold 5u"	H2 : Gold 5u", Tin 100u"	
G3 : Gold 10u"	H3 : Gold 10u", Tin 100u"	
G4 : Gold 15u"	H4 : Gold 15u", Tin 100u"	
G5 : Gold 20u"	H5 : Gold 20u", Tin 100u"	
G6 : Gold 30u"	H6 : Gold 30u", Tin 100u"	