







0.05" X 0.05"(1.27 X 1.27mm) Pin Header

Dual Row 06 to 100 Contacts

Straight And Right Angle Type

SPECIFICATION

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms min.
Contact Resistance	: 20 Milliohms Max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40° C ~ +105° C
Max Processing Temp	: 230° C For 30~60 Seconds (260° C For 10 Seconds)
Contact Material	: Brass
Insulator Material	: Polyester, UL 94V-0 Standard : Nylon-6T
Contact Plated	: Full Gold, Full Tin, Selective Plated

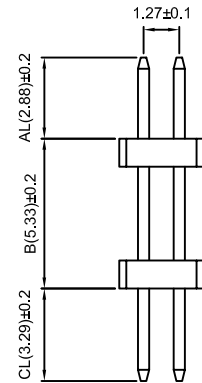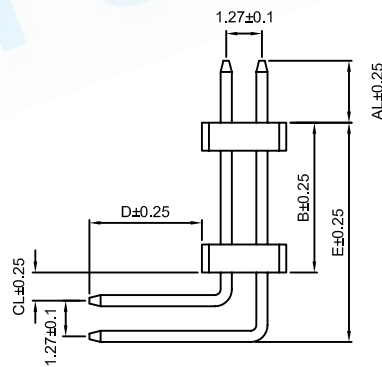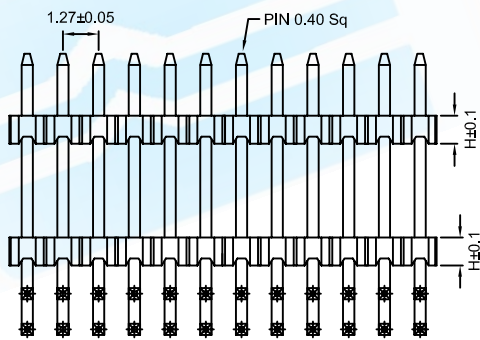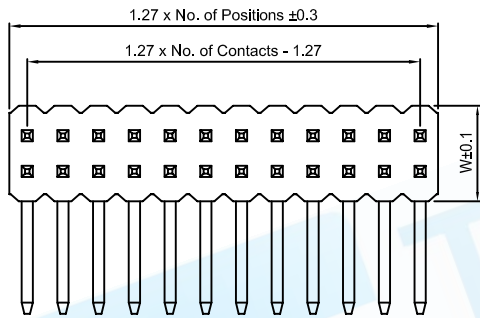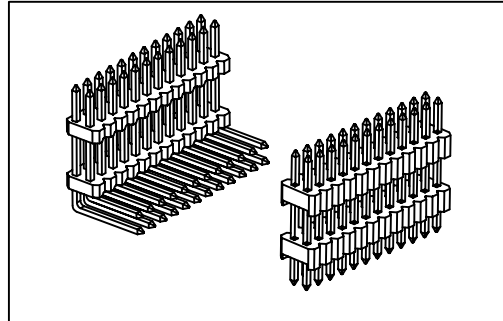

HOW TO ORDER

SERIES NO.	P104-3 2 * XX S XX XX - XX	1:H=2.54mm W=3.0mm SQ0.4
PIN SERIES		2:H=2.54mm W=3.4mm SQ0.4
3 : PITCH =1.27		3:H=2.10mm W=3.0mm SQ0.4
ROW TYPE		4:H=2.00mm W=3.4mm SQ0.4
2:DUAL ROW		5:H=1.00mm W=3.4mm SQ0.4
NO.OF CONTACT PER ROW		6:H=1.50mm W=3.4mm SQ0.4
TERMINAL TYPE		7:H=1.70mm W=3.0mm SQ0.4
S : DIP		8:H=1.70mm W=3.4mm SQ0.4
R : RIGHT		9:H=0.80mm W=3.4mm SQ0.4
CONTACT PLATED		10:H=0.65mm W=3.0mm SQ0.4
		11:H=2.54mm W=5.0mm SQ0.46

流水號(尺寸留法,材質,有導無導,包裝方式等客戶特殊要求)

Full Gold Type	Selective Plated Type Gold Plated on Contact Area Tin Plated on Solder Area	Full Tin Type
GF : Gold Flash	HF : Gold Flash, Tin 100u"	T1 : Tin 100u"
G1 : Gold 3u"	H1 : Gold 3u", Tin 100u"	T2 : Tin 200u"
G2 : Gold 5u"	H2 : Gold 5u", Tin 100u"	
G3 : Gold 10u"	H3 : Gold 10u", Tin 100u"	
G4 : Gold 15u"	H4 : Gold 15u", Tin 100u"	
G5 : Gold 20u"	H5 : Gold 20u", Tin 100u"	
G6 : Gold 30u"	H6 : Gold 30u", Tin 100u"	