

USB SERIES



A TYPE MALE SMD TYPE

Specifications

Current Rating:1.5 Amp
 Voltage Rating:250V AC/DC
 Contact resistance:20m Ohm Max
 Insulator resistance:1,000M ohm min.
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-40°~+85° C

Material And Finish

Insulator:Thermoplastic Nylon 6T(UL 94V-0)
 Contact:Copper Alloy
 Contact Plated:Selective Gold plated(standard)
 Shell:Copper Alloy With Nickel Plated

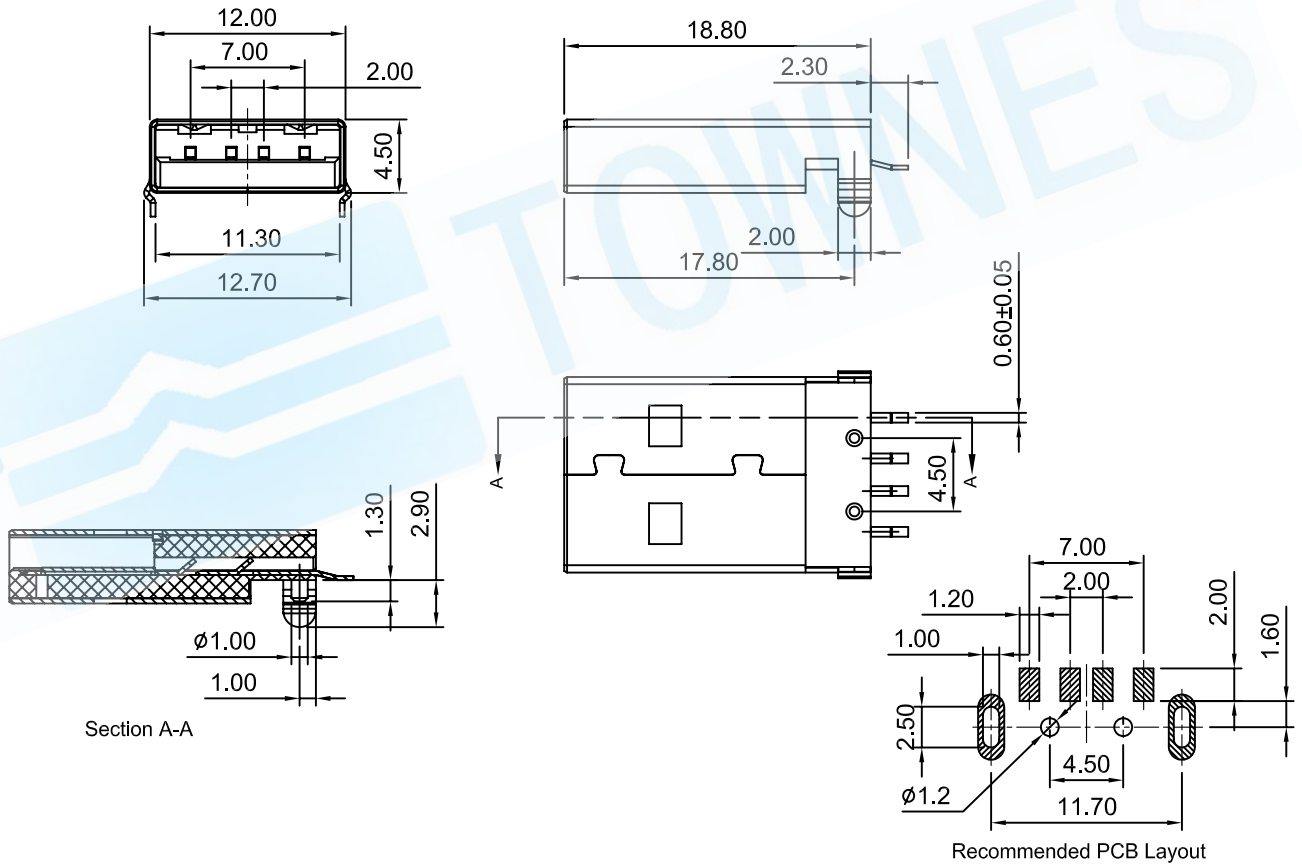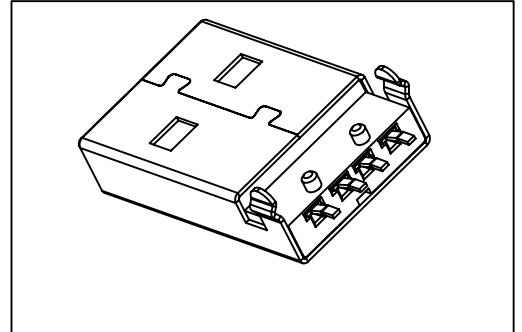

Full Gold Type	Selective Plated Type Gold Plated on Contact Area Tin Plated on Solder Area	Full Tin Type
GF : Gold Flash	HF : Gold Flash, Tin 100u"	T1 : Tin 100u"
G1 : Gold 3u"	H1 : Gold 3u", Tin 100u"	T2 : Tin 200u"
G2 : Gold 5u"	H2 : Gold 5u", Tin 100u"	
G3 : Gold 10u"	H3 : Gold 10u", Tin 100u"	
G4 : Gold 15u"	H4 : Gold 15u", Tin 100u"	
G5 : Gold 20u"	H5 : Gold 20u", Tin 100u"	
G6 : Gold 30u"	H6 : Gold 30u", Tin 100u"	

How To Order

USB4P-AM1XX-X

- Insulator Color:
W:White
B:Black
- Contact Plated
HX : Gold Plated On Contact Area
Tin Plated On Solder Area
- M1:SMD Type
- A:A Type
- P:Male
- No. Of Positions