
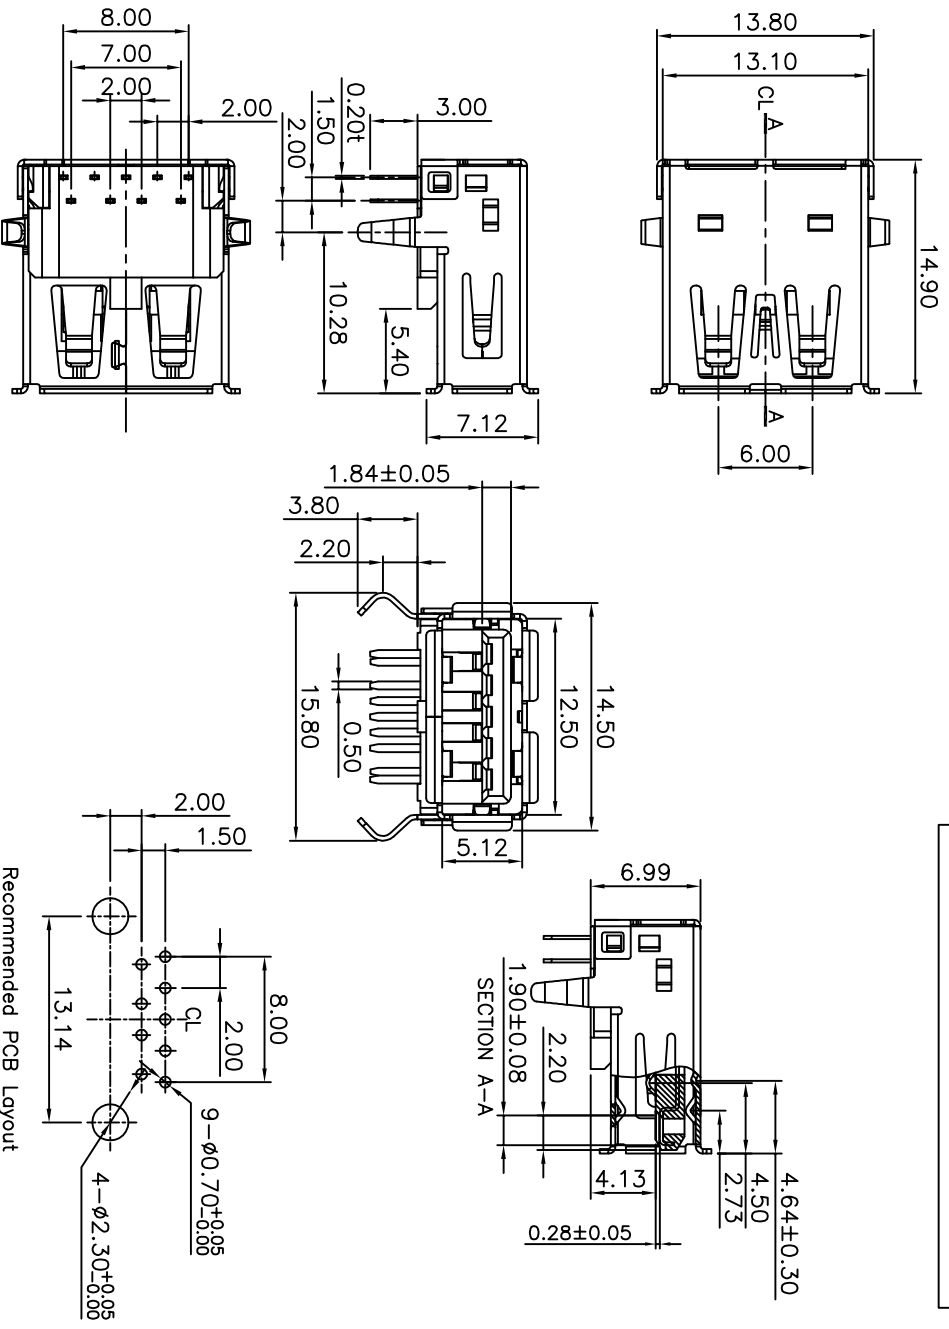


USB 3.0 SERIES


A TYPE FEMALE RIGHT ANGLE TYPE

Specifications:

- Current Rating : 1.5 Amp
- Voltage Rating : 250V AC/DC
- Contact resistance : 30m Ohm Max
- Insulator resistance : 1000M ohm min.
- Withstanding Voltage : 500V AC/Minute
- Operating Temperature Range : -55~+85°C
- Max Processing Temp : 260° for 5 seconds
- Insulator Material : PBT UL 94V-0
- Insulator color : Blue
- Contact Material : 4Pin Phosphor Bronze, 5Pin Brass
- Contact Plated : Selective Gold plated
- Shell : BRASS, NICKEL OVER ALL PLATING.

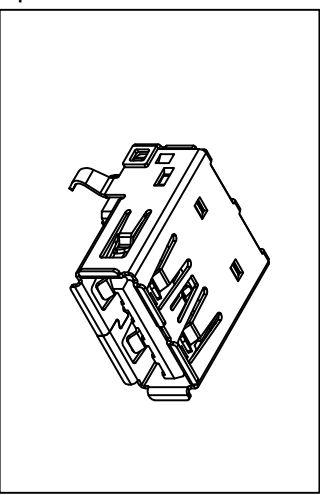

Recommended PCB Layout
Tolerances:±0.05

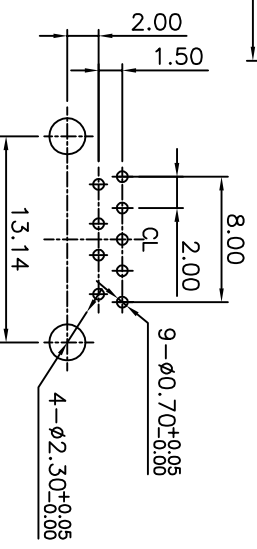

Contact Plated

Code	Selective Plated Type	Solder Area
HF	Gold Flash	Tin 100u"
H1	Gold 3u"	Tin 100u"
H2	Gold 5u"	Tin 100u"
H3	Gold 10u"	Tin 100u"
H4	Gold 15u"	Tin 100u"
H5	Gold 20u"	Tin 100u"
H6	Gold 30u"	Tin 100u"

How To Order

USB9S-AR3PBXX-NPU

Contact Plated