


Material And Finish  
 Housing:PBT+15%GF UL94V-0  
 Insert:PBT+15%GF UL94V-0  
 Contact:0.35\*0.42mm Thickness  
 Phosphor Bronze  
 Plating:Gold plating over Nickel on  
 Contact Area. Tin Plated over  
 Nickel on solder Area.

How To Order  
 MJCR-002-XXXX-X

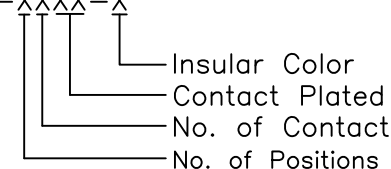


Contact Plated

Code	Contact Area	Solder Area
HF	Gold Flash	Tin 100u"
H1	Gold 3u"	Tin 100u"
H2	Gold 5u"	Tin 100u"
H3	Gold 10u"	Tin 100u"
H4	Gold 15u"	Tin 100u"
H5	Gold 20u"	Tin 100u"
H6	Gold 30u"	Tin 100u"
H7	Gold 50u"	Tin 100u"

Insulator Color

Code	Color
B	Black
U	Blue
G	Gray
R	Red
E	Green
W	White
Y	Yellow
P	Purple
N	Natural

No. of Positions	No. of Contact	Dimension A
4	4	7.85
6	2/4/6	9.90
8	4/6/8	11.90
10	10	11.90

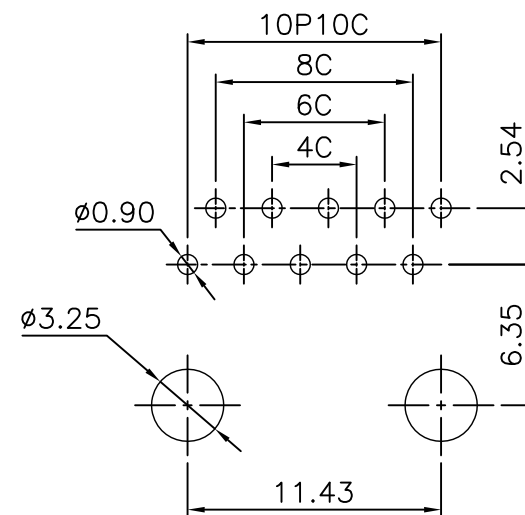

Recommended PCB Layout

1.3			
1.2			
1.1			
1.0	RELEASED	Zhou songlin	26-May-2007
REV.	ECN. NO.	DR.BY	DATE



MAT'L: FINISH:

x.x: ±0.30	x': ±5.0'
x.xx: ±0.20	x.x': ±3.0'
x.xxx: ±0.10	x.xx': ±1.0'
UNIT: mm	
SCALE: 1:1	SHEET: 1/1

TITLE : Modular Jack R/A Type		<b>A4</b>	
APPD.: MARK CHU	PRAT NO :MJCR-002-XXXX-X		
CHKD.: Cel Wang	DWG. NO.: RDA070526-004(DL)		
DR.: Zhou songlin	REV.: 1.0	DATE: 26-May-2007	